


PCI SS

PCI high-speed DMA and data processing interface

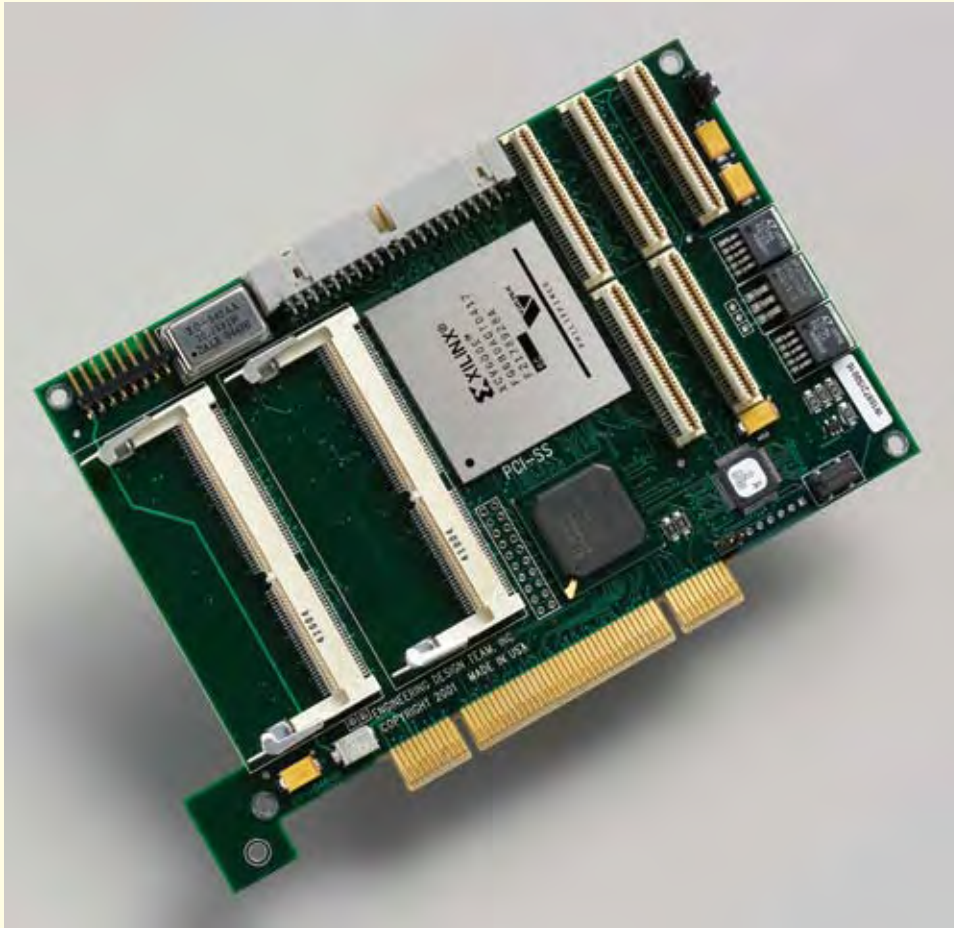

Description

The PCI SS (for PCI) is a main board that supports a mezzanine board with high-speed DMA and other resources. It has a programmable FPGA (Xilinx Virtex-E XCV1000E or optional 2000E or 600E) and synchronous memory of up to 8 MB SRAM.

The board also has four independent programmable PLL clock generators, which can be set to select frequencies with an error rate of less than +/- 50 ppm.

The board works with numerous EDT mezzanine boards. An EDT Bridge is available to connect two main boards.

Features

Main board (fits in a PCI or PCI-X slot) – supports an EDT mezzanine board with high-speed DMA, programmable FPGA resources, and memory

221 LVTTTL programmable signals connected to mezzanine board

FPGA: One programmable Xilinx XCV1000E/2000E/600E

SRAM: Up to 8 MB

Clocks: Four independent programmable PLL clock generators

Applications

EDT mezzanine board support on PCI or PCI-X platforms

Specifications

Product Type	PCI SS is a PCI main board; it supplies DMA, memory, and programmable FPGA resources to a mezzanine board.	
FPGA Resources	One programmable FPGA (Xilinx Virtex XCV1000E or optional 2000E or 600E)	
Memory	SRAM (with HRC or OCM mezzanine board)	One bank of 256 K x 36 (1 MB total) or optional 512 K x 36 (2 MB total) or optional 1 M x 36 (4 MB total) or optional 0
	SRAM (with any other mezzanine board)	Two banks of 256 K x 36 (1 MB per bank; 2 MB total) or optional 512 K x 36 (2 MB per bank; 4 MB total) or optional 1 M x 36 (4 MB per bank; 8 MB total) or optional 0
	DRAM	0
Clocks	Four programmable independent PLL clock generators, each with input and output clocks: Input (reference) clocks can be set to 10.3681 or 40 MHz, or PCI clock. Output clocks can be set with only +/- 50 ppm error to 1.544, 2.048, 6.312, 8.448, 34.368, or 44.736 MHz.	
Data Rates	Peak Typical	TBD TBD (dependent on mezzanine board, bus chipset, and host system)
Data Format (I/O)	Determined by mezzanine board and optional auxiliary board	
PCI Compliance	PCI version DMA Number of slots	PCI 2.3 1, 4, or 16 channels, depending on mezzanine board 1
Connectors	Five CMC-type (IEEE 1386) mezzanine One 8-pin .100" x 1 row square .025" square pins One 40-pin ATA-type expansion	221 LVTTTL I/O (mate to AMP 120527-1 or Molex 71436-2164) For six external debugging LEDs 30 LVTTTL signals for external board or FPGA debugging
Cabling	Consult EDT for purchase options.	
Physical	Weight Dimensions	3.3 oz. typical 6.6 x 4.2 x 0.5 in.
Environmental	Temperature Humidity	Operating 0° to 40° C Non-operating -40° to 70° C Operating 1% to 90%, non-condensing at 40° C Non-operating 95%, non-condensing at 45° C
System and Software	System must have a PCI or PCI-X slot, 32- or 64-bit and 66 MHz or faster (33 MHz will work, but at reduced data rates). Software is included for Windows, Solaris, Linux, and Mac OS X and can be requested for VxWorks; for versions, see our website.	

Support

EDT offers engineer-to-engineer customer support, from phone consultation to custom design of hardware, firmware, and software. Contact us for options and details.

Contact

Engineering Design Team (EDT), Inc.
1100 NW Compton Drive, Suite 306
Beaverton, Oregon 97006
800-435-4320 / 503-690-1234 (phone)
503-690-1243 (fax)
www.edt.com / info@edt.com

Ordering Options

- Mezzanine board: See Compatibility Guide.
- FPGA: **XCV1000E** / 2000E / 600E
- SRAM: Up to 8 MB (options above)

Bold is default.