



BittWare
a molex company

IA-220-U2
U.2 FPGA Accelerator

Agilex on U.2 Form Factor with PCIe Gen4 FPGA-Based Computational Storage Processor for NVME Acceleration

BittWare's IA-220-U2 is a Computational Storage Processor conforming to the U.2 form factor. Ideal for NVMe acceleration, it features an Intel Agilex FPGA supporting PCIe Gen4 directly coupled to local DDR4 memory. This energy-efficient, flexible compute node is intended to be deployed within conventional U.2 NVMe storage arrays (approximately 1:8 ratio) allowing FPGA-accelerated instances of:

- Erasure Coding and Deduplication
- Compression, Encryption & Hashing
- String/Image Search and Database Sort/ Join/Filter
- Machine Learning Inference

The IA-220-U2 can be wholly programmed by customers developing in-house capabilities or delivered as a ready-to-run pre-configured solution featuring Eideticom's NoLoad® IP. The IA-220-U2 is front-serviceable in a 1U chassis and can be mixed in with storage units in the same server, allowing users to mix-and-match storage and acceleration.




key features

**PCIe Gen4
Support**

**Up to
16 GBytes
DDR4**

**Intel Agilex™ FPGA
with up to 1.4M
Logic Elements**

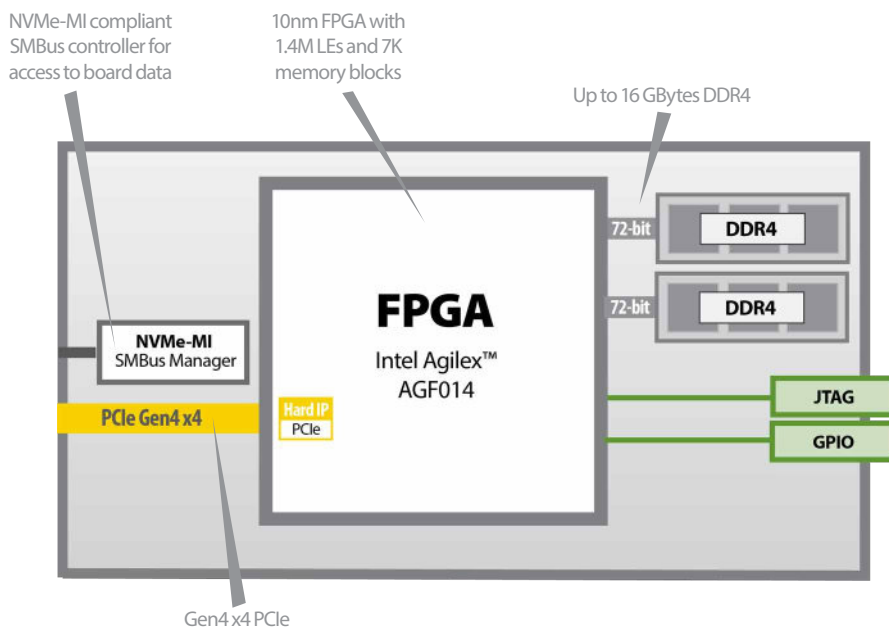

Order your IA-220-U2 pre-configured with Eideticom's NoLoad®:

- Plug-and-play solution
- NVMe compatible and standards-based with no OS changes
- Reduced TCO/TCA - lower power and reduced IO
- CPU offload improves QoS up to 40x
- Disaggregates compute and storage into independently scalable resources
- CPU agnostic
- Reconfigurable accelerators, enabling scalable compute architectures

Learn more at www.eideticom.com

Additional Services

Take advantage of BittWare's range of design, integration, and support options



Customization

[Additional specification options](#) or [accessory boards](#) to meet your exact needs.




Server Integration

Available pre-integrated in our [TeraBox servers](#) in a range of configurations.



Application Optimization

Ask about our services to help you port, optimize, and benchmark your application.



Service and Support

BittWare Developer Site provides online documentation and issue tracking.


Board Specifications

FPGA	<ul style="list-style-type: none"> Intel Agilex AGF014 Core speed grade -3: I/O speed grade -3 Contact BittWare for other Agilex FPGA options
On-board DDR4 SDRAM	<ul style="list-style-type: none"> Two banks of DDR4 SDRAM x 72 bits Up to 8GB per bank Transfer Rate: 2400 MT/s
Host interface	<ul style="list-style-type: none"> PCIe Gen4 x4 U.2 Connector Compliant to SFF-8639
Datacenter deployment	<ul style="list-style-type: none"> On-board NVMe-MI compliant SMBus controller (Spec. 1.0a) Field flash update via software or SMBus SMBus FPGA flash control: anti-bricking, fallback and multiboot SMBus access to unique board data and temperature sensor
Back panel features	<ul style="list-style-type: none"> User LEDs accessible
Development features	<ul style="list-style-type: none"> JTAG connector for access to the FPGA, flash and debug tools GPIO connector
Power supply monitoring and reporting	<ul style="list-style-type: none"> Voltage monitoring Temperature monitoring Fault condition reporting to FPGA

Cooling	<ul style="list-style-type: none"> U.2 drive case optimized for cooling with passive heatsink
Electrical	<ul style="list-style-type: none"> Hot swapping tolerant On-card power derived from U.2 supplies Power dissipation is application dependent Typical power consumption ~20W Card designed to deliver up to 25W power consumption
Environmental	<ul style="list-style-type: none"> Operating temperature: 5°C to 35°C Cooling: forced air
Quality	<ul style="list-style-type: none"> Manufactured to IPC-A-610 Class 2 RoHS compliant
Form factor	<ul style="list-style-type: none"> U.2 compliant 2.5" Drive Form Factor Height: 15mm

Development Tools

FPGA development	BittWare SDK including PCIe driver, libraries, and board monitoring utilities (Linux support only)
Application development	Supported design flows - Intel High-Level Synthesis (C/C++) and Quartus Prime Pro (HDL, Verilog, VHDL, etc.)



Rev 2022.02.11 | February 2022

© BittWare 2022

Agilex is a registered trademark of Intel Corp. All other products are the trademarks or registered trademarks of their respective holders.

BittWare
a **molex** company

International Distributors



Sky Blue Microsystems GmbH
Geisenhausenerstr. 18
81379 Munich, Germany
+49 89 780 2970, info@skyblue.de
www.skyblue.de



In Great Britain:
Zerif Technologies Ltd.
Winnington House, 2 Woodberry Grove
Finchley, London N12 0DR
+44 115 855 7883, info@zerif.co.uk
www.zerif.co.uk