



RCX C-Link Base Mode Configurations

1. "Extension cord mode" -- to EDT or other standard Camera Link Framegrabber

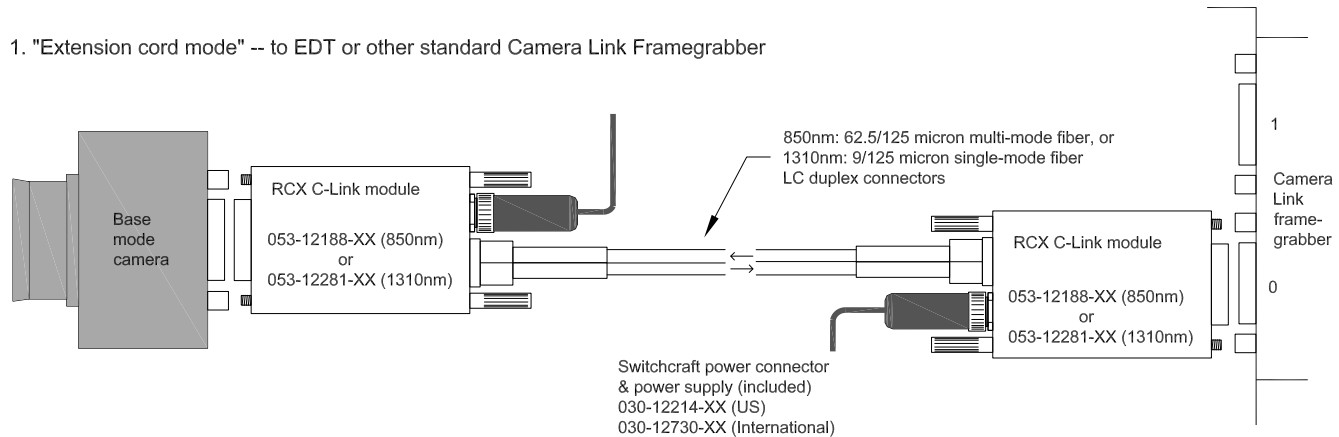

2. Direct to PCI / PCIe DV FOX fiber optic framegrabber*

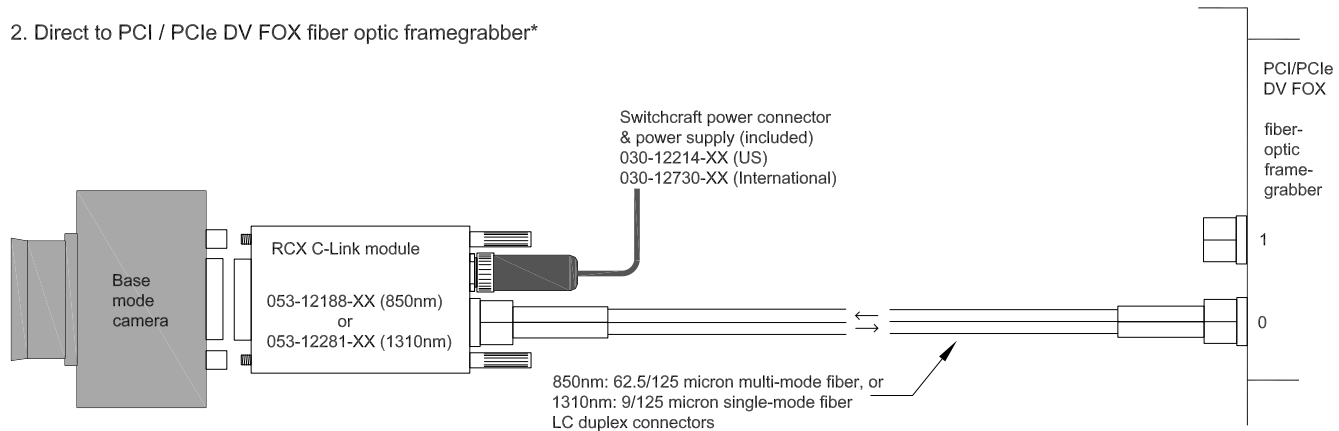

Notes:

1. "Standard" configuration is 850nm, 62.5/125 micron multi-mode fiber.
2. *Direct-from-fiber FOX boards have been discontinued.

International Distributors



Sky Blue Microsystems GmbH
Geisenhausenerstr. 18
81379 Munich, Germany
+49 89 780 2970, info@skyblue.de
www.skyblue.de



In Great Britain:
Zerif Technologies Ltd.
Winnington House, 2 Woodberry Grove
Finchley, London N12 0DR
+44 115 855 7883, info@zerif.co.uk
www.zerif.co.uk