



RCX C-Link Base Mode Configurations

1. "Extension cord mode" -- to EDT or other standard Camera Link Framegrabber

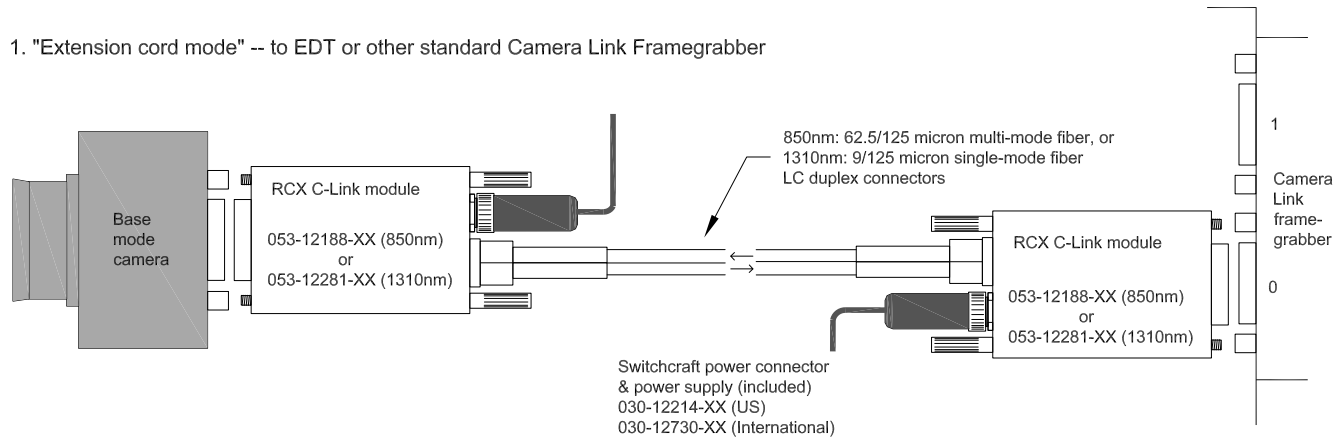

2. Direct to PCI / PCIe DV FOX fiber optic framegrabber*

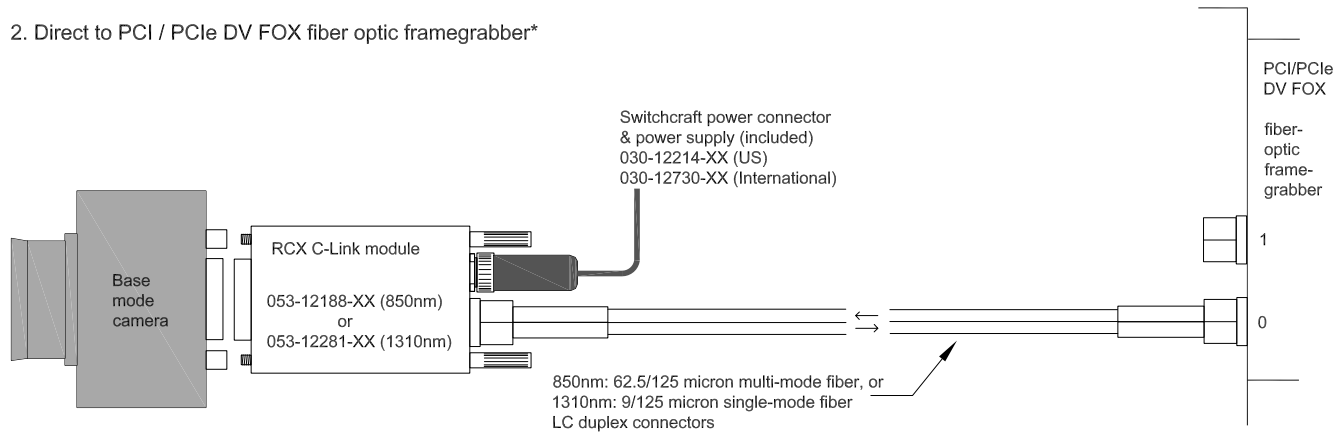

Notes:

1. "Standard" configuration is 850nm, 62.5/125 micron multi-mode fiber.
2. *Direct-from-fiber FOX boards have been discontinued.

Contact



Sky Blue Microsystems GmbH

Geisenhausenerstr. 18 www.skyblue.de
81379 Munich info@skyblue.de
Germany Tel. +49 (0) 89 - 780297 0

