


OCM2.7G

Optical carrier multi-rate interface for 2.7 Gb/s

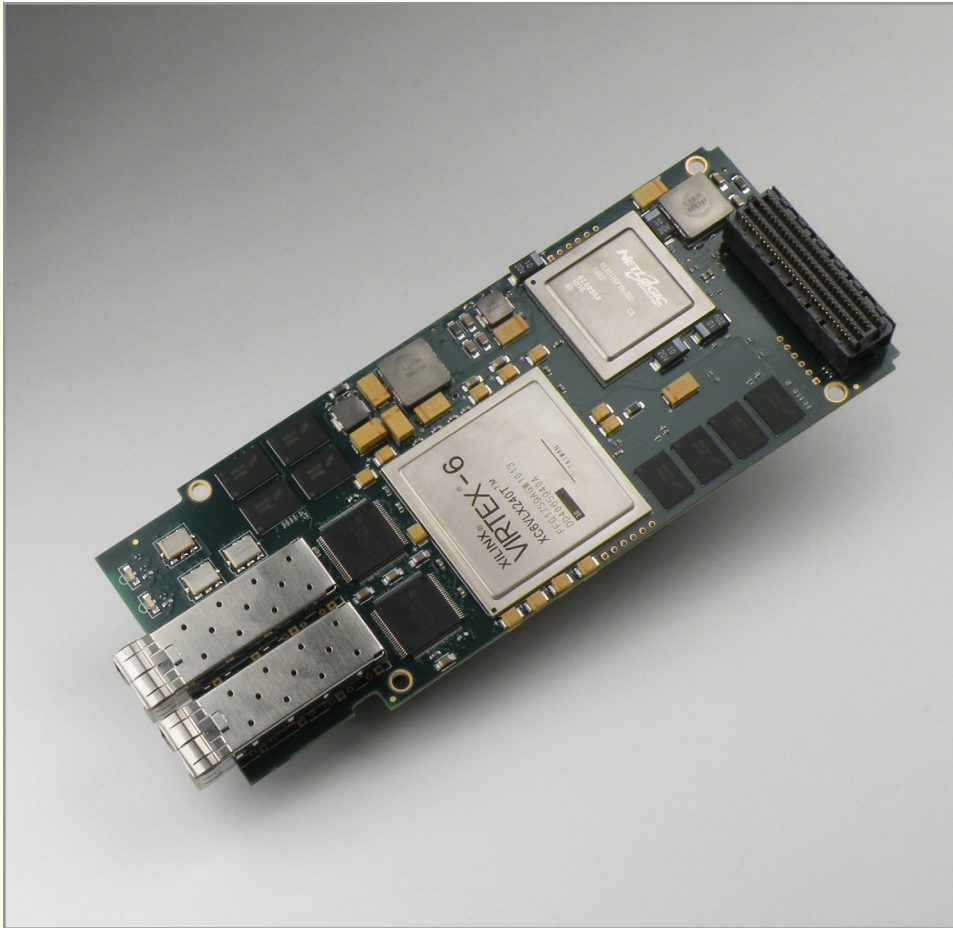

Description

OCM2.7G is a mezzanine board that pairs with an AMC main board to support either 1GbE (optical or electrical) or OC3/12/48 (STM1/4/16), or both. It is available for either a full-size or a mid-size AMC slot.

The board's two channels each support up to 2.7 Gbits per second via a small form pluggable (SFP) transceiver – one per channel. Each SFP supports 1GbE (optical or electrical), or OC3/12/48 (STM1/4/16) at 155.52, 622.08, or 2488.32 Mb/s (1310 nm).

The board has one programmable Xilinx Virtex 6 FPGA and three crystal oscillators (XOs) – one per channel and one additional – for internal reference. Each XO is independently programmable to any frequency from 10 to 215 MHz.

The board includes 1 GB of DDR2 DRAM, partitioned into two independent interfaces, for snapshot recording and data buffering. An optional TCAM supports additional data processing.

EDT provides FPGA configuration files so you can input and output raw data, detect to a SONET/SDH frame, or descramble a framed signal. Custom configuration files can be requested.

The main board supplies DMA, plus additional memory and programmable FPGA resources.

Features

Mezzanine board – pairs with the EDT AMC FX5 main board, which adds DMA, programmable FPGA resources, and memory

Size: Full-size or optional mid-size

Channel 0: One SFP for 1GbE (optical or electrical) or OC3/12/48 (STM1/4/16), 155.52, 622.08, or 2488.32 Mb/s – 1310 nm

Channel 1: One SFP for the same data format options as channel 0

FPGAs: One programmable (Xilinx Virtex 6 XC6VLX240T)

DRAM: Two independent 512 MB banks (DDR2) for snapshot recording and data buffering

TCAM: One optional

Clocks: Three XOs (one per channel, plus one additional) for internal reference, each independently programmable from 10 to 215 MHz

Applications

Telecommunications network monitoring

Ethernet monitoring

SONET/SDH to ethernet conversion

Specifications																						
Product Type	OCM2.7G is an optical carrier multi-rate mezzanine board for two channels of 2.7 Gb/s each; it requires an EDT AMC FX main board.																					
FPGA Resources	One programmable FPGA (Xilinx Virtex 6 LXT XC6VLX240T), plus FPGA resources on main board																					
Memory	DRAM (DDR2) Two independent banks of 512 MB each (for snapshot recording / data buffering) TCAM One optional																					
Clocks	Three internal reference XOs One per channel plus one additional, each independently programmable to any frequency from 10 to 215 MHz																					
Data Rates	Dependent on such factors as data format, main board, and system variables.																					
Data Format (I/O)	Channel 0 1GbE (1000 Base-T or -X) or SONET OC3/12/48 (SDH STM1/4/16) – 155.52, 622.08, or 2488.32 Mb/s – 1310 nm Channel 1 Identical to channel 0																					
Transceivers	Two (channels 0 and 1 each have one) are included, supporting data as shown below.																					
	<table border="1"> <thead> <tr> <th></th> <th>ELECTRICAL</th> <th>OPTICAL</th> </tr> <tr> <th>CHANNELS 0, 1 (1 SFP each)</th> <th>1GbE</th> <th>1GbE or OC3/12/48 (STM1/4/16)</th> </tr> </thead> <tbody> <tr> <td>Output power</td> <td>–</td> <td>-9.5 to -3 dBm</td> </tr> <tr> <td>Center wavelength</td> <td>–</td> <td>1270 to 1360 nm</td> </tr> <tr> <td>Sensitivity</td> <td>–</td> <td>-18 dBm</td> </tr> <tr> <td>Maximum input power</td> <td>–</td> <td>0 dBm</td> </tr> <tr> <td>Connector</td> <td>RJ45</td> <td>LC</td> </tr> </tbody> </table>		ELECTRICAL	OPTICAL	CHANNELS 0, 1 (1 SFP each)	1GbE	1GbE or OC3/12/48 (STM1/4/16)	Output power	–	-9.5 to -3 dBm	Center wavelength	–	1270 to 1360 nm	Sensitivity	–	-18 dBm	Maximum input power	–	0 dBm	Connector	RJ45	LC
	ELECTRICAL	OPTICAL																				
CHANNELS 0, 1 (1 SFP each)	1GbE	1GbE or OC3/12/48 (STM1/4/16)																				
Output power	–	-9.5 to -3 dBm																				
Center wavelength	–	1270 to 1360 nm																				
Sensitivity	–	-18 dBm																				
Maximum input power	–	0 dBm																				
Connector	RJ45	LC																				
Connectors	One RJ45 or LC on each transceiver as shown above																					
Cabling	Consult EDT for purchase options.																					
Physical	Weight 8.4 oz. typical (with a main board) Dimensions – full-size board pair 7.25 x 2.875 x 1.25 in. (with a main board) Dimensions – mid-size board pair 7.25 x 2.875 x 0.75 in. (with a main board)																					
Environmental	Temperature Operating 0° to 40° C Non-operating -40° to 70° C Humidity Operating 1% to 90%, non-condensing at 40° C Non-operating 95%, non-condensing at 45° C																					
System and Software	For details on system requirements and EDT-provided software driver packages, see specifications for your EDT main board.																					

Ordering Options

- Main board: AMC FX5
- Size: **Full** or mid
- TCAM: **0** / 1
- Transceivers: (options above)

Bold is default. For more options, see main board detail. **Ask** about custom options.

Contact



Sky Blue Microsystems GmbH
Geisenhausenerstr. 18
81379 Munich, Germany
+49 89 780 2970, info@skyblue.de
www.skyblue.de



In Great Britain:
Zerif Technologies Ltd.
H5 Ash Tree Court
Nottingham NG8 6PY, England
+44 115 855 7883, info@zerif.co.uk
www.zerif.co.uk