



## Datasheet

# CoaXPress to CoaXPress over Fiber Dual Signal Converter

## Innovative Approach

KAYA Instruments' **CoaXPress to CoaXPress over Fiber Signal Converter** is the industry's first CoaXPress v2.1 signal converter, offering a high-resolution stream interface that converts CoaXPress signals for transmission over fiber. It supports distances up to 80 km in single-mode and up to 300 m in multi-mode. Fiber optic is electrically isolated, hence it does not radiate nor is it susceptible to electromagnetic interference, also eliminates the problems associated with grounding. The fiber cable is not easily tapped, providing more secure communication. The signal converter utilizes a standard CoaXPress over Fiber protocol, ensuring compatibility with standard fiber frame grabbers.

## Intelligent Design

The **CoaXPress (CXP) to CoaXPress over Fiber (CoF) Signal Converter** utilizes standard Micro-BNCs converting CXP to CoaXPress over Fiber utilizing standard SFP+ that can support distances up to 80 km. The CXP to CoF Signal Converter can provide the camera power using the CoaXPress link with an external power supply. The Signal Converter is able to provide an uplink of up to 25 Gbps and downlink up to 41.6 Mbps. A Micro USB port is available for individual link and general information status and firmware updates.

## Key Features

- CoaXPress v2.1 support
- CoaXPress over fiber (CXPoF) support
- Support up to 12 G of operation
- Power over CoaXPress with 13 W per link
- Fanless design
- Solves distance limitation of CoaXPress
- Downlink/Uplink of 25 Gbps and 41.6 Mbps respectively
- Data rates up to 12.5 Gbps per link
- Extension using Multi-Mode fiber up to 300 m
- Extension using Single-Mode fiber up to 80 km
- CWDM support
- Small mechanical footprint
- Improved power connector
- Rugged design
- Bidirectional CoaXPress communication
- Flexible SFP+ module for fiber optic connection
- Micro-BNC connector for CoaXPress links
- Plug and Play, no configuration required
- Industrial -40 °C to +80 °C operation temperature

## Applications

- High speed cameras
- High definition cameras
- Panoramic cameras
- Aerospace remote systems
- Surveillance
- Sports judgement and analytics


# TECHNICAL DATA

General	
Interface standard(s)	CoaXPress v2.1 (CoaXPress 1.1 backward compatible) CoaXPress over Fiber 1.0
Connectors	2x Micro-BNC CoaXPress v2.1 connector 2x SFP+ for CoaXPress over Fiber 1x Micro USB system status port 1x Power 28 V DC input connector
Status LEDs	2x CoaXPress connection status per connector 2x Fiber connection status per connector 1 System status LED
Number of links	2
Line-scan cameras supported	Yes
Supported CXP down-connection speeds	<ul style="list-style-type: none"><li>• 1.25 Gbit/s (CXP-1)</li><li>• 2.5 Gbit/s (CXP-2)</li><li>• 3.125 Gbit/s (CXP-3)</li><li>• 5 Gbit/s (CXP-5)</li><li>• 6.25 Gbit/s (CXP-6)</li><li>• 10 Gbit/s (CXP-10)</li><li>• 12.5 Gbit/s (CXP-12)</li></ul>
Cooling method	Air cooling, passive heatsink
Dimensions	117 mm x 114.5 mm x 23.5 mm (4.6" x 4.5" x 0.92")
Weight	300 g (10.58 oz)
Power Input <sup>1</sup>	28 V DC
Power Consumption	< 7 W (Self consumption not including cameras)
Environmental conditions	
Operating ambient air temperature	-40 °C to +80 °C (-40 °F to +176 °F)
Operating ambient air humidity	10% to 90% RH non-condensing
Storage ambient air temperature	-40 °C to +80 °C (-40 °F to +176 °F)
Storage ambient air humidity	10% to 90% RH non-condensing
Certifications	
Electromagnetic - EMC standards	<ul style="list-style-type: none"><li>• The European EMC Directive 2014/30/EU</li><li>• The United States FCC rule 47 CFR 15</li></ul>
EMC - emission	<ul style="list-style-type: none"><li>• EN 55032:2015 Class B</li><li>• FCC 47 Part 15 Class B</li></ul>
EMC - immunity	<ul style="list-style-type: none"><li>• EN 55035:2017 Class B</li><li>• EN 61000-4-3</li><li>• EN 61000-4-4</li><li>• EN 61000-4-6</li></ul>
Flammability	PCB compliant with UL 94 V-0
RoHS	Compliant with the European Union Directive 2011/65/EU (ROHS2)
REACH	Compliant with the European Union Regulation No 1907/2006
WEEE	Must be disposed of separately from normal household waste and must be recycled according to local regulations

<sup>1</sup> Operating the unit from voltage different than 24 V ± 2 V can damage the cameras that are not compatible with this voltage.

Ordering Information	
CoaXPress to CoaXPress over Fiber Signal Converter	KY-FEXT-II-D-2CH
SFP+ single-mode module, 10 km	KY-SFP-10GLR-31
SFP+ multi-mode module, 300 m	KY-SFP-10GSR-85
CWDM SFP+ module	KY-CWDM-10G-xSP
Fiber cable	KY-FCA-X-XX
CoaXPress Cable	KY-CCA-X-XX
Power supply 24V, 90W	KY-PWR-007


# MECHANICAL DRAWINGS

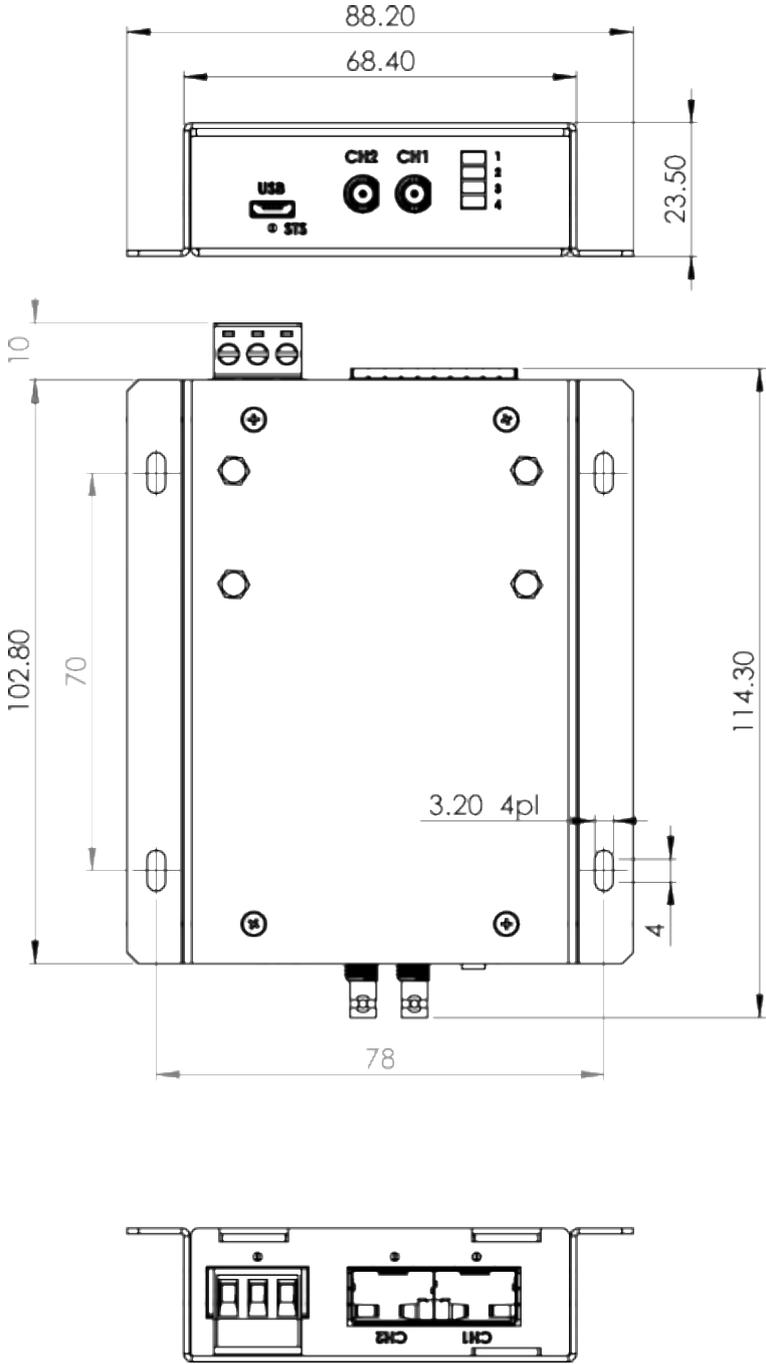


*Dimensions are in millimeters.*

# SYSTEM STRUCTURE


Single camera topology:

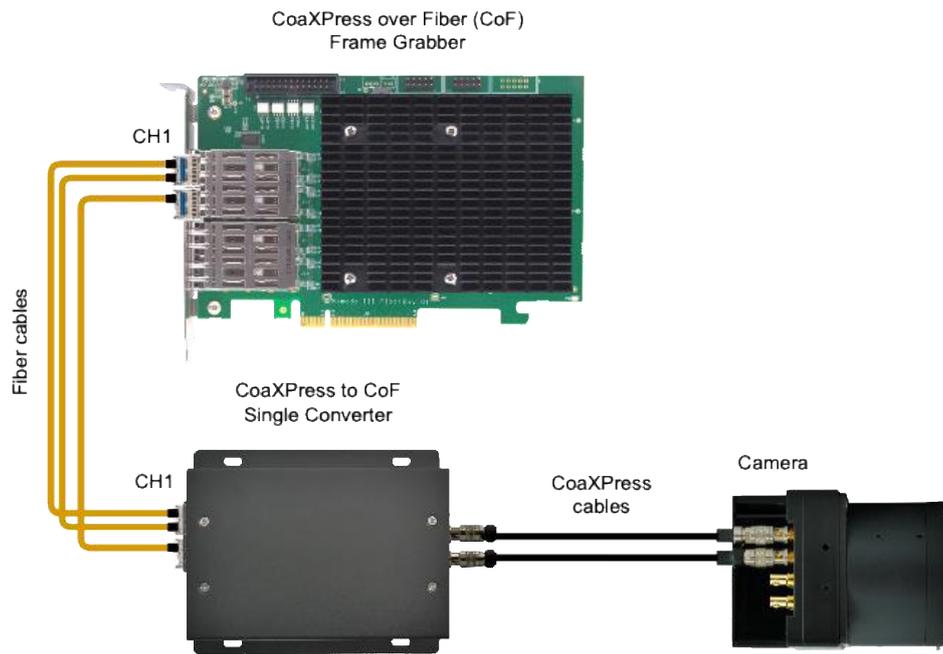

Dual camera topology:

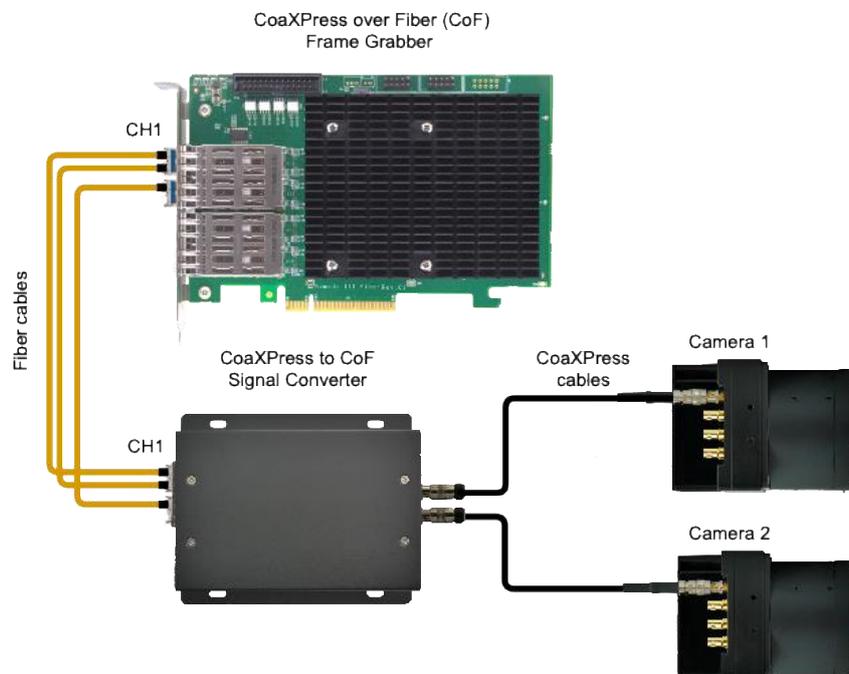

CWDM:

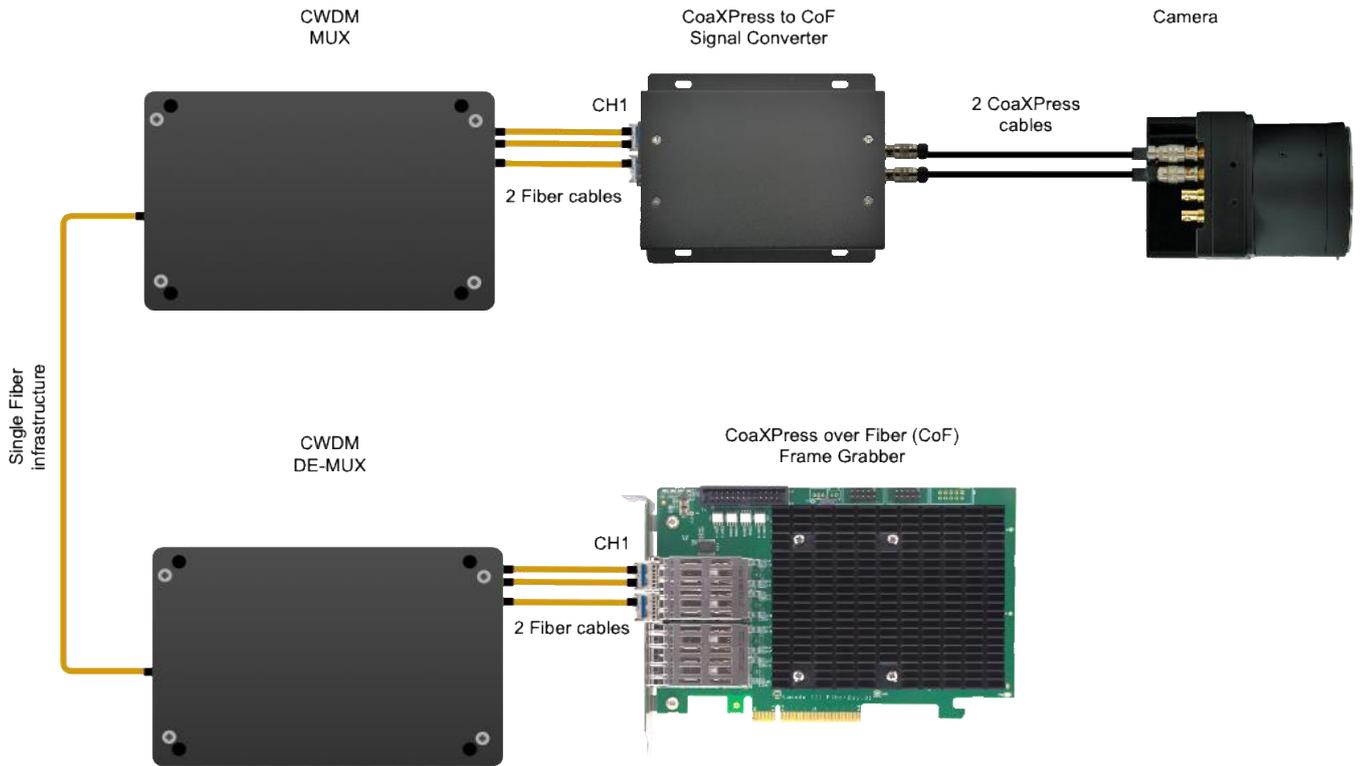

**NOTE:** Channel 1 (CH1) must have a duplex fiber connection (Or BIDI SFP with single fiber cable) while other channels can have a simplex fiber connection from device side to host.

# COMPATIBILITY

**KAYA Instruments** creates and maintains compatibility and interfaces for the most common and advanced vision image processing libraries and applications. Major support is available for **MVtec Halcon**, **National Instruments' LabVIEW** and **MathWorks' MATLAB**.

Supported vision standards:



Supported vision libraries:



Supported operating systems:



*Please check our website for an up-to-date list of other supported libraries and software package*

International Distributor



Sky Blue Microsystems GmbH  
Geisenhausenerstr. 18  
81379 Munich, Germany  
+49 89 780 2970, info@skyblue.de  
www.skyblue.de

## KAYA Instruments

Please feel free to contact our sales team for pricing, availability, documentation or customization at our e-mails – we will be happy to provide assistance and consultation.

Sales Inquiries: info@skyblue.de  
Technical Support: info@skyblue.de



© 2024 KAYA Instruments, Inc. All rights reserved. KAYA Instruments, the KAYA Instruments Komodo logo, JetCam logo, Predator, Iron and combinations thereof are trademarks of KAYA Instruments, Inc. in the United States and/or other jurisdictions. Microsoft Windows is a registered trademark of Microsoft Corporation. Other names are for informational purposes only and may be trademarks of their respective owners. KAYA Instruments is not liable for harm or damage incurred by information contained in this document.