

## EMVA 1288 Datasheet

This datasheet describes the specification according to the standard 1288 Standard for Characterization and Presentation of Specification Data for Image Sensors and Cameras of European Machine Vision Association (EMVA) (See [www.standard1288.org](http://www.standard1288.org)).

|                           |                             |                                  |                                      |
|---------------------------|-----------------------------|----------------------------------|--------------------------------------|
| Vendor                    | KAYA Instruments            | Sensor                           | IMX252                               |
| Model                     | Iron252M                    | Sensor type                      | CMOS                                 |
| Camera type               | Monochrome                  | Shutter type                     | Global                               |
| Data type                 | Single                      | Overlap capabilities             | Overlapping                          |
| Sensor type               | CMOS                        | Frame rate                       | 90 Hz                                |
| Lens category             | C-Mount                     | Exposure control                 | by irradiance                        |
| Resolution                | 2048 x 1536 ,12 bits        | Exposure time                    | 6000 $\mu$ s                         |
| Pixel size                | 3.45 $\mu$ m x 3.45 $\mu$ m | Illumination                     | Variable with constant exposure time |
| Maximum readout rate      | 90 fps                      | Irradiation Steps                | 50                                   |
| Dark current compensation | No                          | Irradiation calibration accuracy | -                                    |
| Interface type            | CXP-12                      | Irradiation measurement error    | -                                    |
| Serial number             | 2020023                     | Standart version                 | 3.1                                  |
| Firmware version          | 3.1-2020.11.15              | Light source                     | Integrating Sphere                   |
| Sensor diagonal           | 16.1mm                      |                                  |                                      |

International Distributor



Sky Blue Microsystems GmbH  
Geisenhausenerstr. 18  
81379 Munich, Germany  
+49 89 780 2970, [info@skyblue.de](mailto:info@skyblue.de)  
[www.skyblue.de](http://www.skyblue.de)

## Summary Sheet for Operation Point 1 at a Wavelength of 520 nm


### Camera setting

|             |             |
|-------------|-------------|
| Gain        | GainLevelx1 |
| Black level | 128         |


### Operation point parameters

|                           |        |
|---------------------------|--------|
| Environmental temperature | 2.75   |
| Camera body temperature   | 2.75   |
| Sensor temperature        | 39.592 |
| Processor temperature     | 36     |

### Photon Transfer

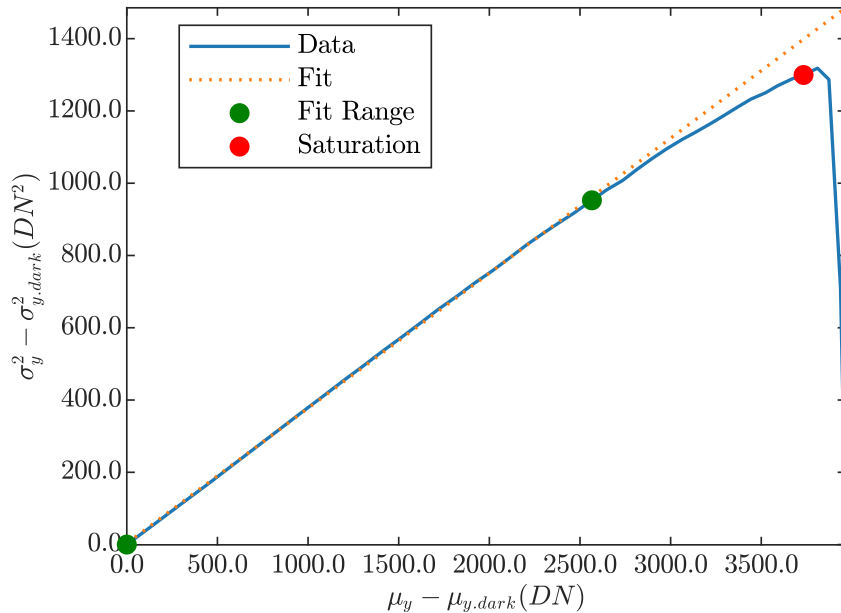

### Signal-to-Noise Ratio

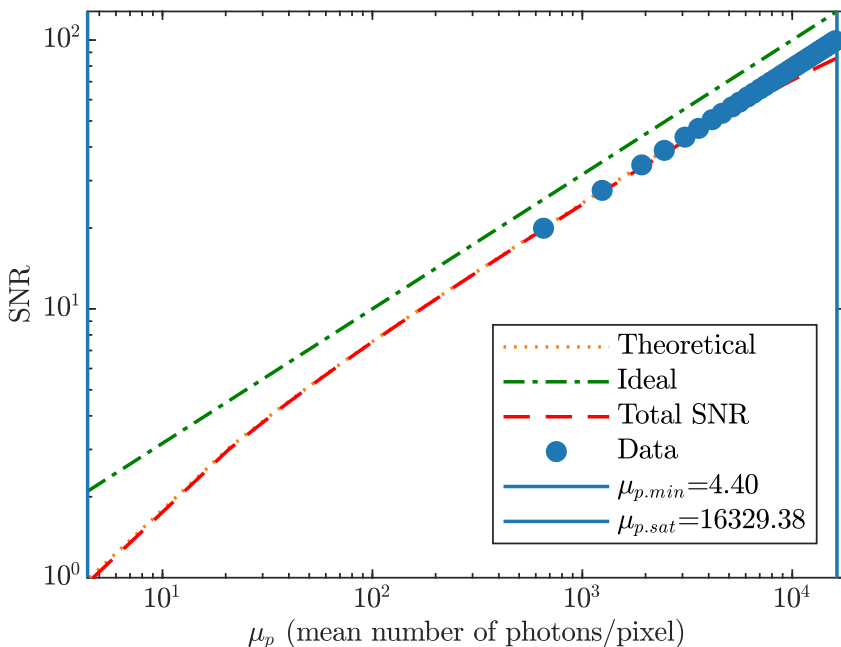

### Performance

#### Quantum efficiency

|        |         |   |
|--------|---------|---|
| $\eta$ | 61.6724 | % |
|--------|---------|---|

#### System gain

|     |         |                    |
|-----|---------|--------------------|
| K   | 0.37369 | DN/e <sup>-</sup>  |
| 1/K | 2.676   | e <sup>-</sup> /DN |

#### Temporal dark noise

|                   |         |                |
|-------------------|---------|----------------|
| $\sigma_d$        | 2.0729  | e <sup>-</sup> |
| $\sigma_{y,dark}$ | 0.82665 | DN             |

#### Signal-to-noise ratio

|                      |          |     |
|----------------------|----------|-----|
| SNR <sub>max</sub>   | 100.3529 |     |
|                      | 40.0306  | dB  |
|                      | 6.6489   | bit |
| 1/SNR <sub>max</sub> | 0.99648  | %   |

#### Absolute sensitivity threshold

|                    |         |                                 |
|--------------------|---------|---------------------------------|
| $\mu_{p,min}$      | 4.3976  | p                               |
| $\mu_{p,min,area}$ | 0.36947 | p/μm <sup>2</sup>               |
| $\mu_{e,min}$      | 2.7121  | e <sup>-</sup>                  |
| $\mu_{e,min,area}$ | 0.22786 | e <sup>-</sup> /μm <sup>2</sup> |

#### Saturation capacity

|                    |            |                                 |
|--------------------|------------|---------------------------------|
| $\mu_{p,sat}$      | 16329.3782 | p                               |
| $\mu_{p,sat,area}$ | 1371.9284  | p/μm <sup>2</sup>               |
| $\mu_{e,sat}$      | 10070.7119 | e <sup>-</sup>                  |
| $\mu_{e,sat,area}$ | 846.1006   | e <sup>-</sup> /μm <sup>2</sup> |

#### Dynamic range

|    |           |     |
|----|-----------|-----|
| DR | 3713.2167 |     |
|    | 71.395    | dB  |
|    | 11.8585   | bit |

#### Spatial nonuniformities

|                      |         |                |
|----------------------|---------|----------------|
| DSNU <sub>1288</sub> | 0.65561 | e <sup>-</sup> |
|                      | 0.245   | DN             |
| PRNU <sub>1288</sub> | 0.60664 | %              |


#### Linearity error

|                   |          |   |
|-------------------|----------|---|
| LE <sub>min</sub> | -0.49286 | % |
| LE <sub>max</sub> | 0.25467  | % |


#### Dark current

|                |         |                   |
|----------------|---------|-------------------|
| $\mu_{l,mean}$ | 25.4864 | e <sup>-</sup> /s |
|                | 9.5241  | DN/s              |
| $\mu_{l,var}$  | 1.1252  | e <sup>-</sup> /s |
|                | 0.15712 | DN/s              |


## Sensitivity

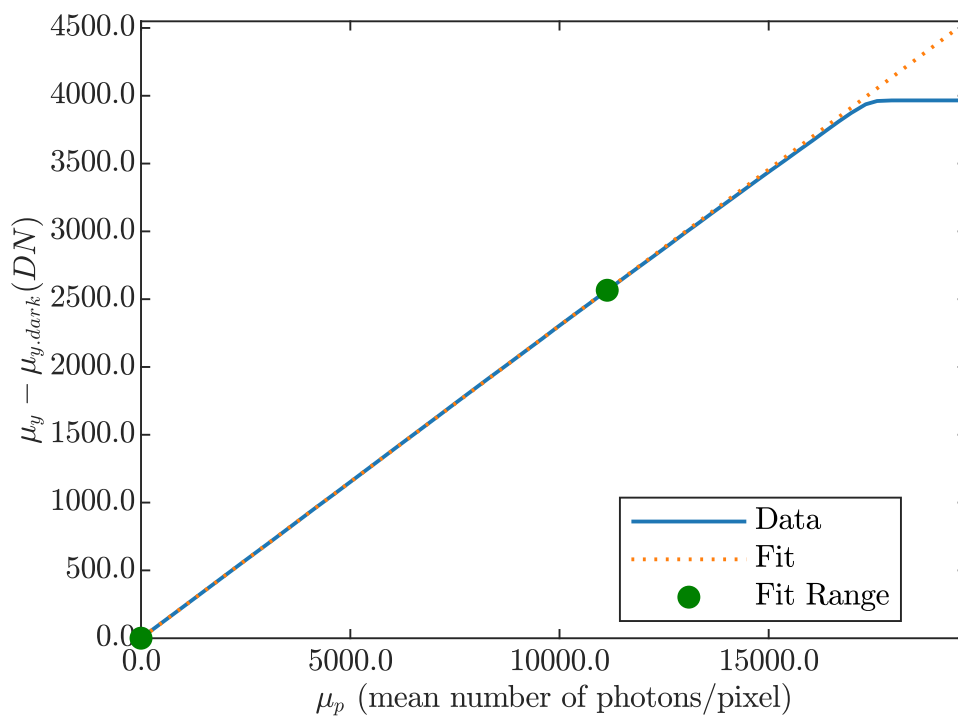


## Linearity

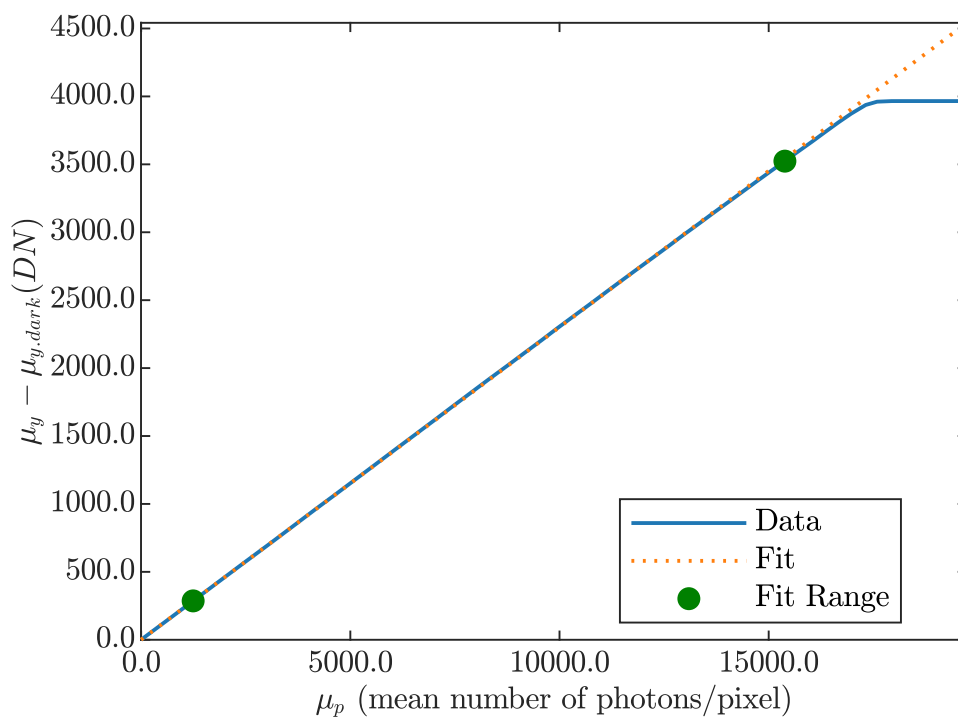


## Deviation Linearity

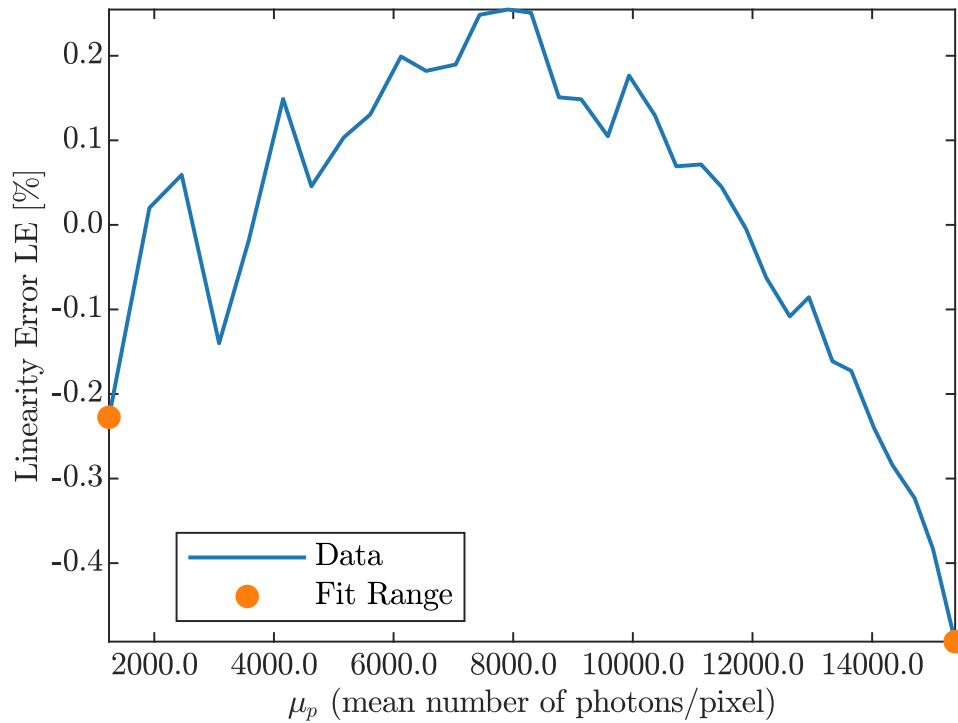


## Horizontal Spectrogram PRNU

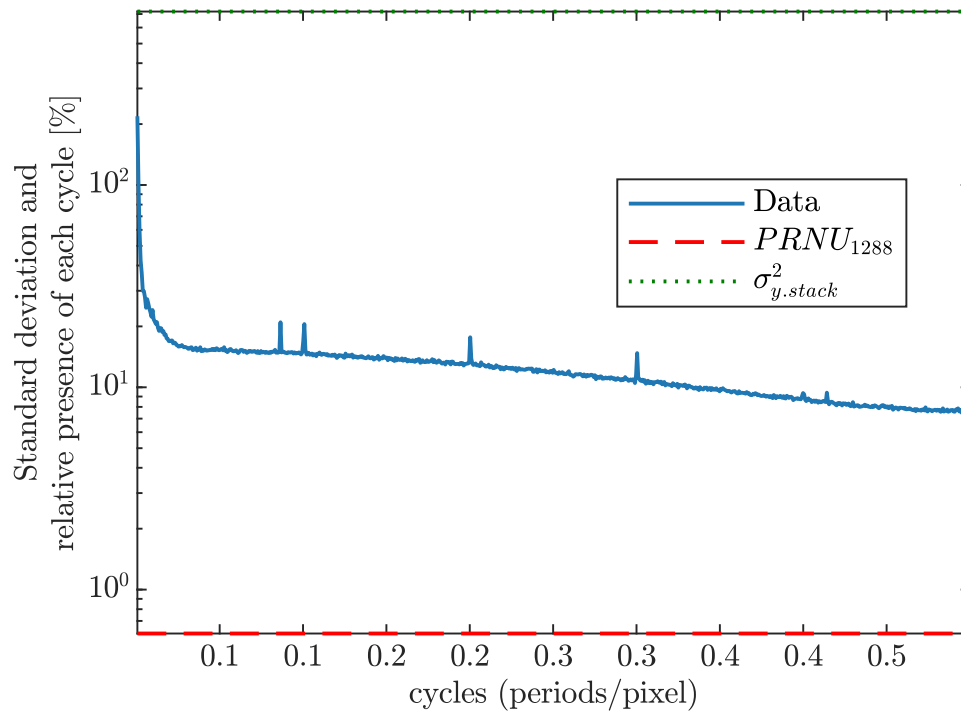


## Horizontal Spectrogram DSNU

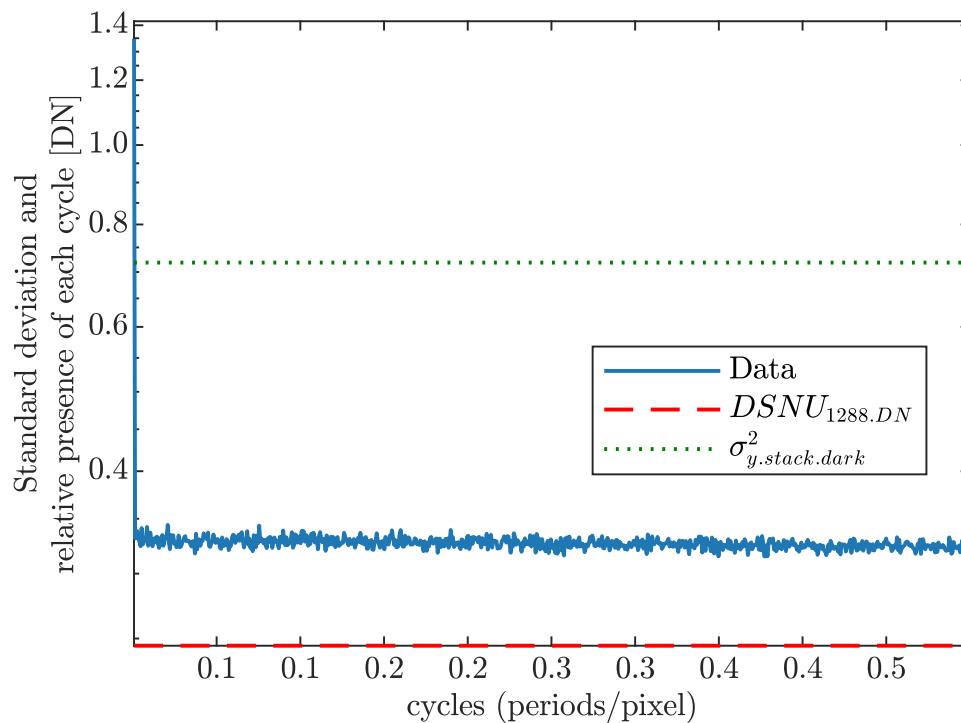


## Vertical Spectrogram PRNU

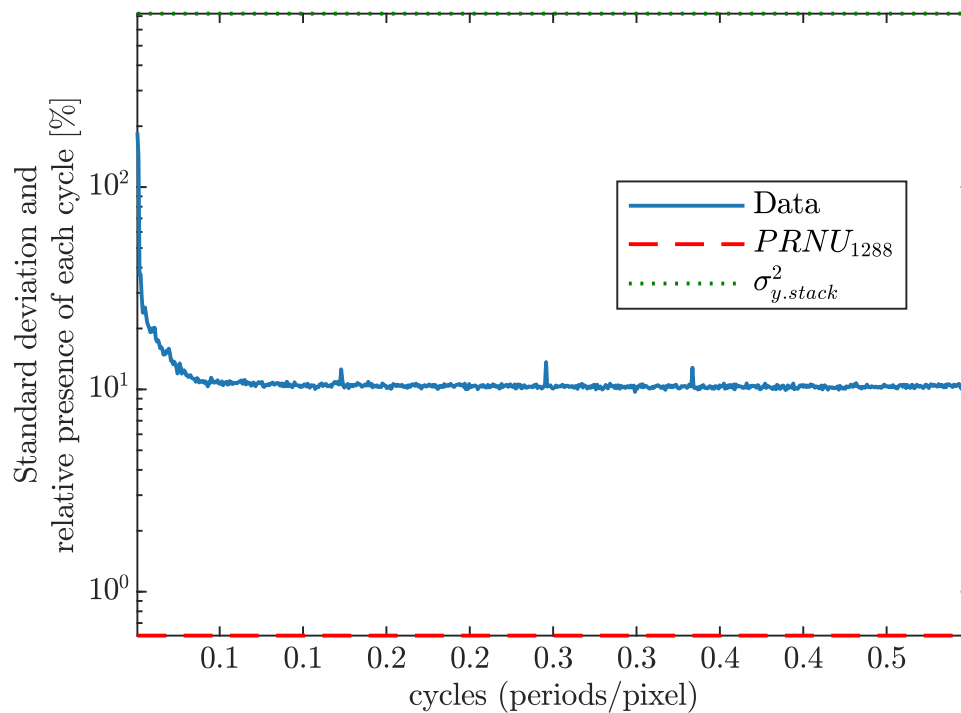


## Vertical Spectrogram DSNU

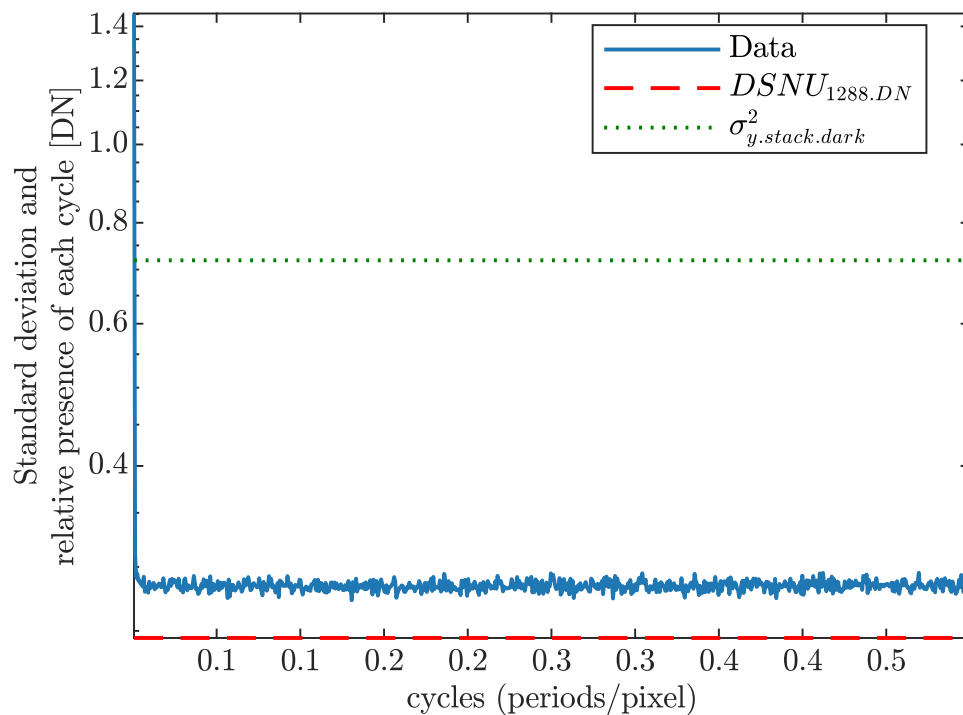


## Logarithmic Histogram PRNU

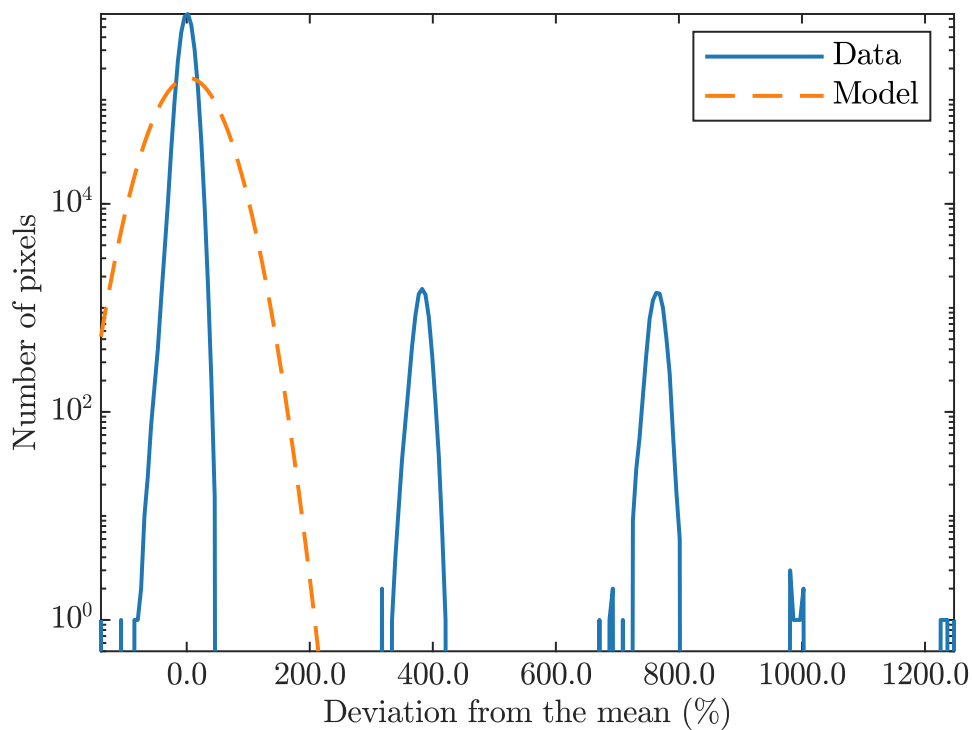


## Logarithmic Histogram DSNU

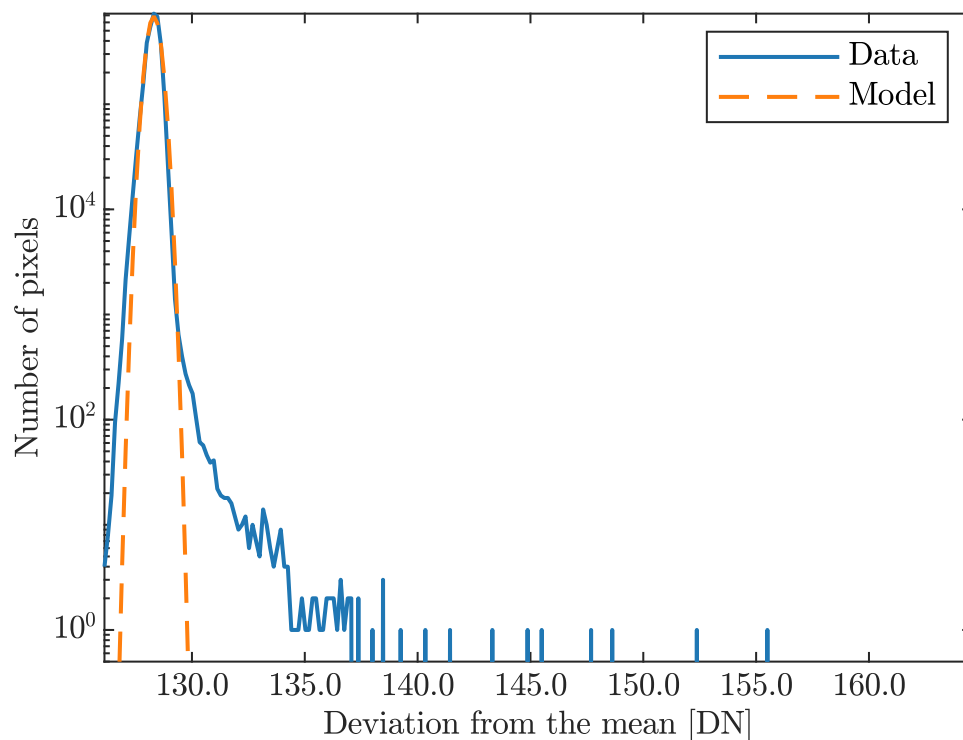


## Accumulated Log Histogram PRNU

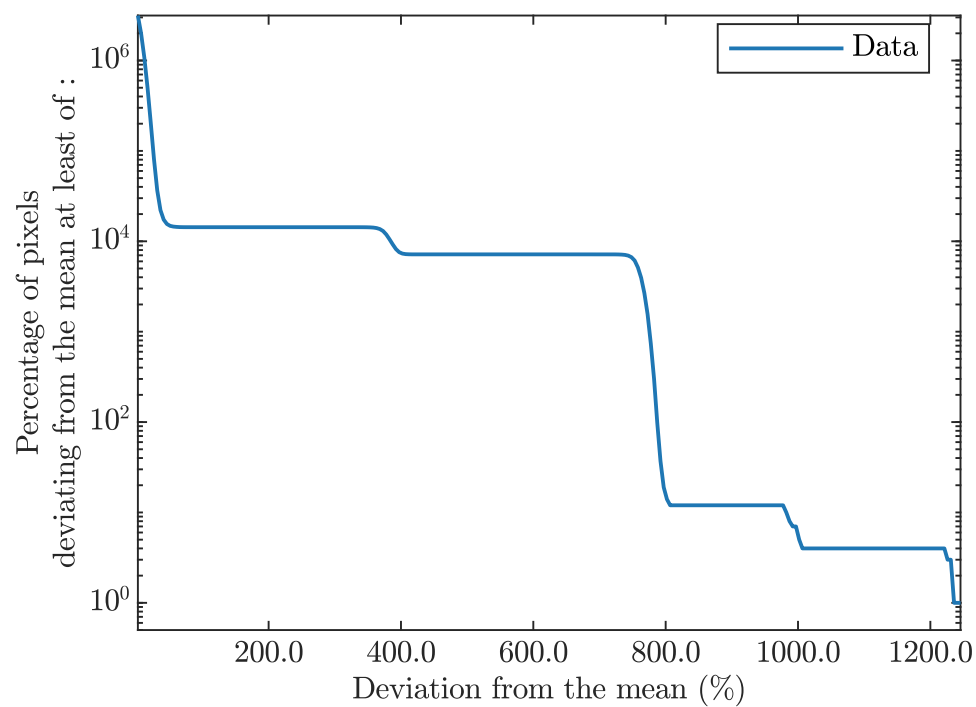


## Accumulated Log Histogram DSNU

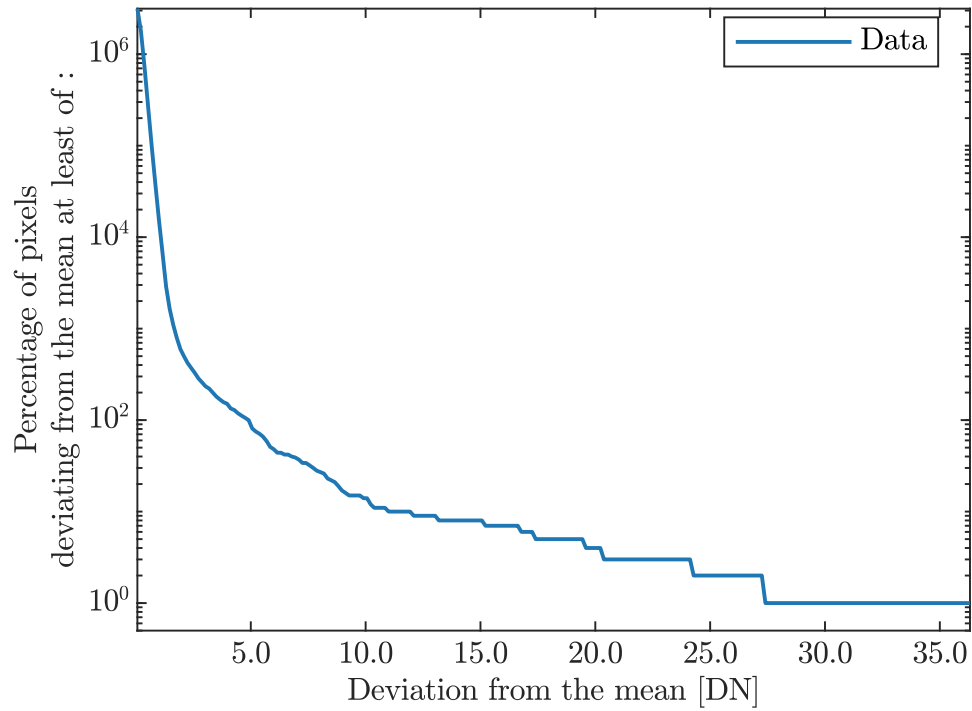

## Horizontal Profile

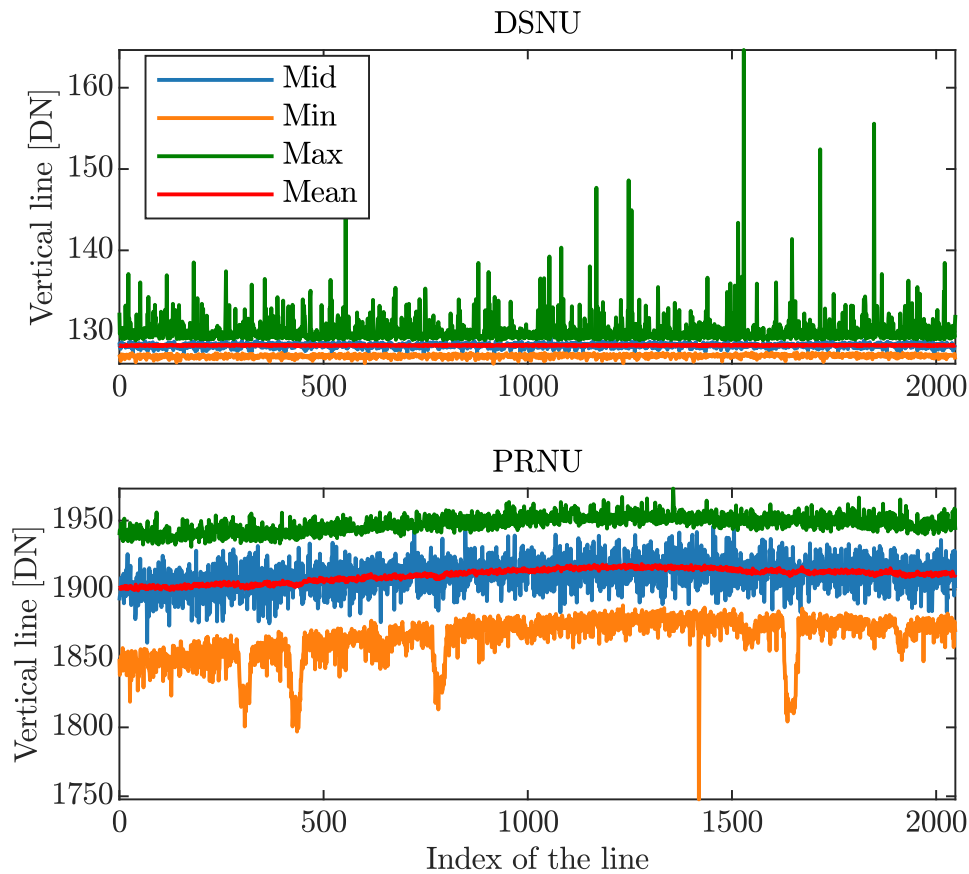


## Vertical Profile

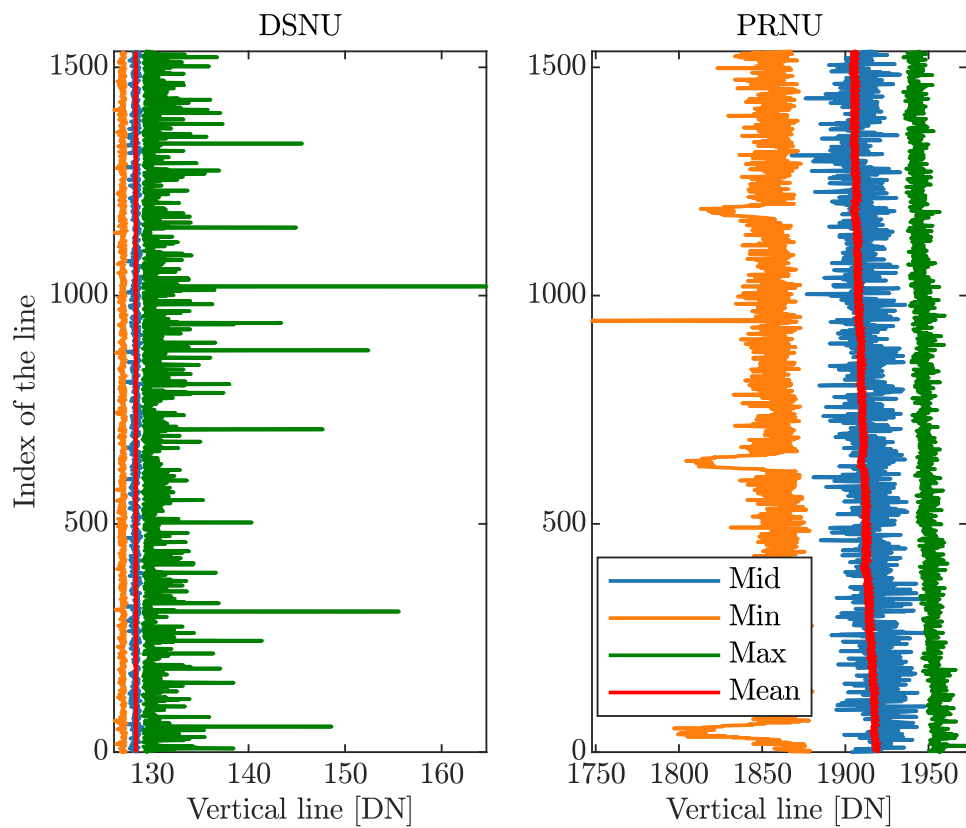


## Dark Current

### Dark Current from Mean

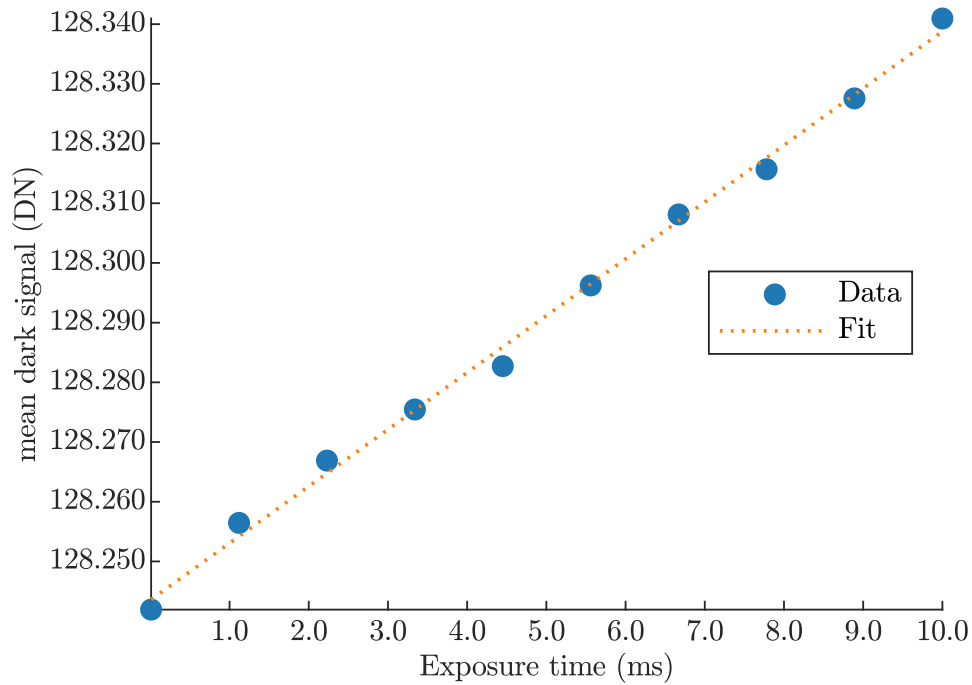

### Dark Current from Variance

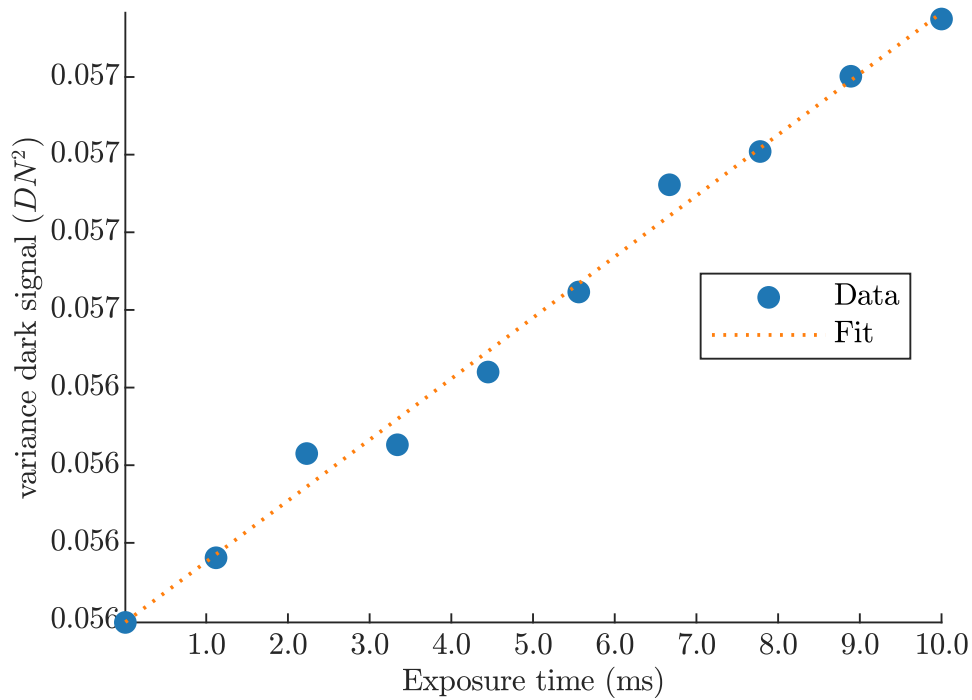

## Acceptance Test Result (Not part of EMVA1288 standard)

Test Date

17-Nov-2020 13:41:25

Tester Name

Tester

Table 1: Acceptance test summary (Not part of EMVA1288 standard)

| Test Number | Test Name     | Test Status | Numeric Value | Margins   | Failure Description |
|-------------|---------------|-------------|---------------|-----------|---------------------|
| 1           | Dead Pixels   | Pass        | 0             | $\leq 10$ |                     |
| 2           | Dead Clusters | Pass        | 0             | $\leq 0$  |                     |
| 3           | QE            | Pass        | 61.7          | $\geq 55$ |                     |
| 4           | SNR           | Pass        | 40.0          | $\geq 38$ |                     |
| 5           | DR            | Pass        | 71.4          | $\geq 67$ |                     |
| 6           | Flash         | Pass        | -             | -         |                     |
| 7           | Uart          | Pass        | -             | -         |                     |
| 8           | SensorControl | Pass        | -             | -         |                     |
| 9           | SensorLVDS    | Pass        | -             | -         |                     |
| 10          | Temperature   | Pass        | -             | -         |                     |
| 11          | Voltages      | Pass        | -             | -         |                     |
| 12          | MACOM         | Pass        | -             | -         |                     |
| 13          | GPIO          | Pass        | -             | -         |                     |
| 14          | DRAM          | Pass        | -             | -         |                     |

Table 2: Dead pixels summary (Not part of EMVA1288 standard)

| Number | Column | Row | Deviation from mean DSNU [DN] | Deviation from mean PRNU [%] |
|--------|--------|-----|-------------------------------|------------------------------|
| -      | -      | -   | -                             | -                            |

## Summary Sheet for calibration of User Set Factory (Not part of EMVA1288 standard)

### Camera setting

|               |              |
|---------------|--------------|
| Gain          | GainLevelx1  |
| Black level   | 128          |
| Frame rate    | 90 Hz        |
| Exposure time | 6000 $\mu$ s |

### Operation point parameters

|                           |        |
|---------------------------|--------|
| Environmental temperature | 2.75   |
| Camera body temperature   | 2.75   |
| Sensor temperature        | 39.592 |

### Spectrum of Calibration light source

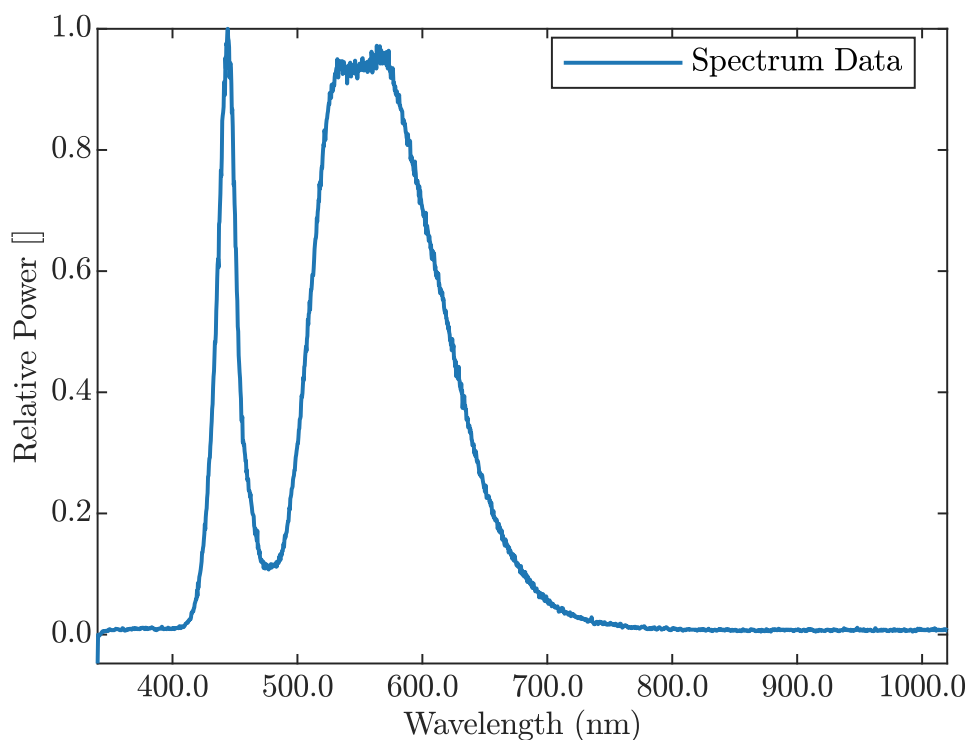


Table 3: Calibrated features summary

| Number | Feature    | Calibration Status |
|--------|------------|--------------------|
| 1      | DSNU       | Yes                |
| 2      | PRNU       | Yes                |
| 3      | Bad Pixels | Yes                |

### Dead Pixels

Table 4: Dead pixels summary

| Number | Column | Row | Deviation from mean DSNU [DN] | Deviation from mean PRNU [%] |
|--------|--------|-----|-------------------------------|------------------------------|
| -      | -      | -   | -                             | -                            |

International Distributor

**sky blue**  
microsystems

Sky Blue Microsystems GmbH  
Geisenhausenerstr. 18  
81379 Munich, Germany  
+49 89 780 2970, info@skyblue.de  
www.skyblue.de