

CoaXPress Range Extender over Fiber (SFP+)

Overview

KAYA Instruments' CoaXPress Range Extender over Fiber is industry's first CXP range extender which provides a high resolution stream interface for distances up to 10km in single-mode and up to 300m in multi-mode. Optic fiber is electrically isolated, hence it does not radiate nor is it susceptible to electromagnetic interference, also eliminates the problems associated with grounding. The fiber cable is not easily tapped, providing more secure communication. The system is constructed of two converters, one on the camera side and one on the host side. The converter on the camera side can provide power to the camera over CoaXPress link, while the converter on the host side can sink power from the frame grabber. The converters use flexible SFP+ modules for optical connection that can be easily changed. The range extender is able to provide an uplink of up to 6.25Gbps and downlink at 20.83Mbps.



Features

- Coaxpress V1.1 compatible
- Solves distance limitation of CoaXPress
- Downlink/Uplink of 6.25 Gbps and 20.83 Mbps respectively
- Extension for distances up to 10km in single-mode and up to 300m in multi-mode
- Bidirectional CoaXPress communication
- Flexible SFP+ module for Fiber connection
- DIN rail mounting (optional)
- DIN 1.0/2.3 connectors for CoaXPress links
- Plug and Play, no need to configure
- Power over CoaXPress support
- 0°C to 50°C operating environment temperature


Applications

- ✓ High speed cameras
- ✓ High definition cameras
- ✓ Panoramic cameras
- ✓ Defense remote systems
- ✓ Surveillance
- ✓ Robotic Vision

Deliverables

- Host and device converters
- SFP+ modules
- Power supply
- Hardware user manual
- Coax cables (optional)
- Fiber cables (optional)

System Block Diagram

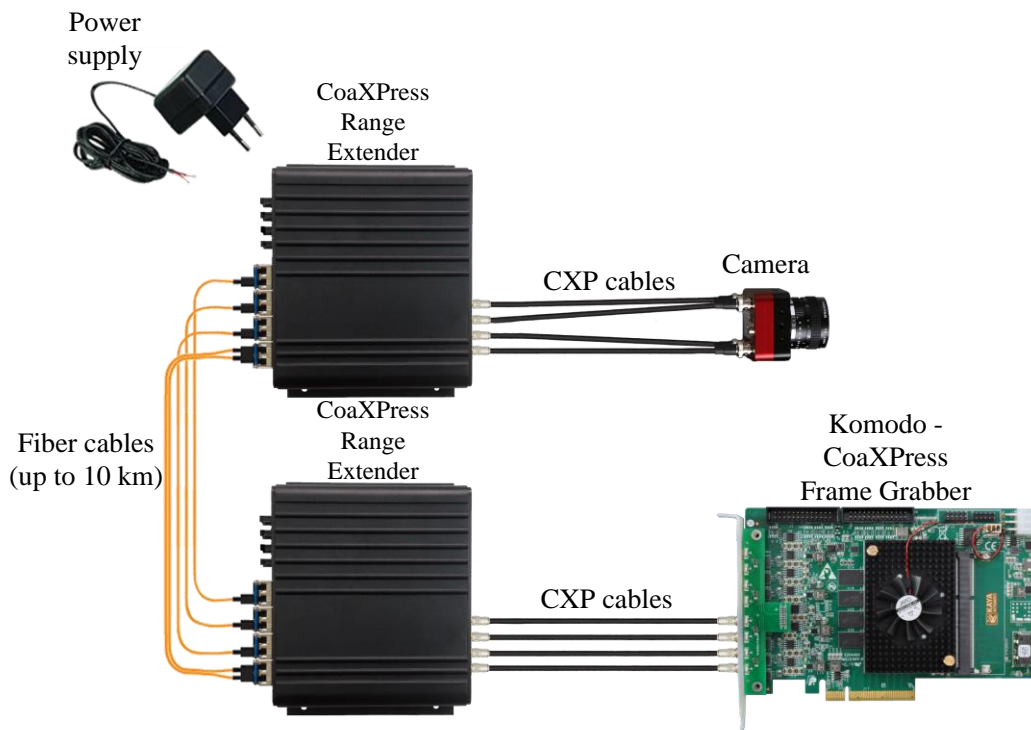

Contact



Sky Blue Microsystems GmbH
Geisenhausenerstr. 18
81379 Munich
Germany

www.skyblue.de
info@skyblue.de
Tel. +49 (0) 89 - 780297 0

